

QUICK HEAT SOLDERING IRON


TWO STAGE HIGH POWER HEATER

TQ-95

CERAMIC
HEATER

DUAL
POWER

CAP
INCLUDED

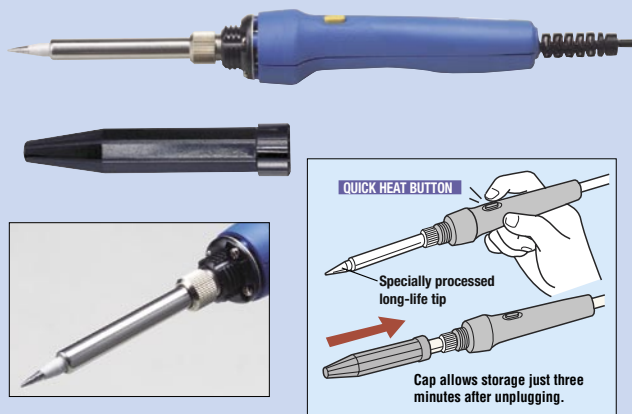


●2 stage heat switching system. ●Pulling the trigger boosts the output of normal position (Low) by 10 times. ●The pistol grip was designed through careful ergonomics research. It can be operated for extended periods comfortably even by someone with a small hand. The design allows full concentration on the work by making it easy to see the tip.


Model	TQ-95
Voltage	110-130V, 220V AC 50/60Hz
Power Consumption	High 150W / Low 15W (110-130V model) High 200W / Low 20W (220-240V model)
Length	210mm (w/o cord bushing)
Weight	65g (w/o cord)

Replacement Parts

- ☛ TQ-95 Heater
- ☛ TQ-95H
- ☛ TQ-95 Spacer
- ☛ TQ-77SS
- ☛ TQ-95 Collar
- ☛ TQ-77NUT
- ☛ Heater Barrel
- ☛ TQ-77HP (L) 220-240V
- ☛ TQ-77HP (S) 100-130V
- ☛ TQ-95 Heat Insulation Cap
- ☛ TQ-CAP

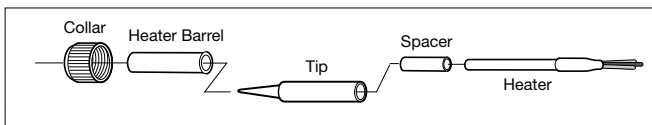

Replacement Tips () Size 65mm=for 220-240V AC model

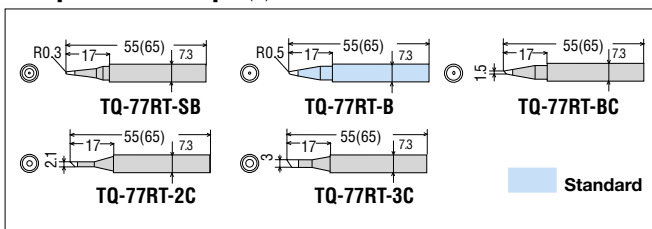

QUICK HEAT SOLDERING IRON

TWO STAGE HIGH POWER HEATER

TQ-77

CERAMIC
HEATER

DUAL
POWER




●2 stage heat switching system. ●Pulling the trigger boosts the output of normal position (Low) by 10 times. ●The pistol grip was designed through careful ergonomics research. It can be operated for extended periods comfortably even by someone with a small hand. The design allows full concentration on the work by making it easy to see the tip.

Model	TQ-77
Voltage	110-130V, 220-240V AC 50/60Hz
Power Consumption	High 150W / Low 15W (110-130V model) High 200W / Low 20W (220-240V model)
Length	167mm (w/o cord bushing)
Weight	90g (w/o cord)

Replacement Parts

- ☛ TQ-77 Heater
- ☛ TQ-77H
- ☛ TQ-77 Spacer
- ☛ TQ-77SS
- ☛ TQ-77 Collar
- ☛ TQ-77NUT
- ☛ Heater Barrel
- ☛ TQ-77HP (L) 220-240V
- ☛ TQ-77HP (S) 110-130V

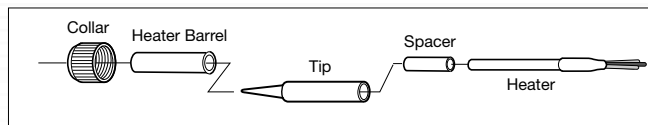

Replacement Tips () Size 65mm=for 220-240V AC model

