


SCHOTTKY BARRIER RECTIFIER

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU

MECHANICAL DATA

- Case: JEDEC DO-201AD molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 0.041ounce, 1.15 grams

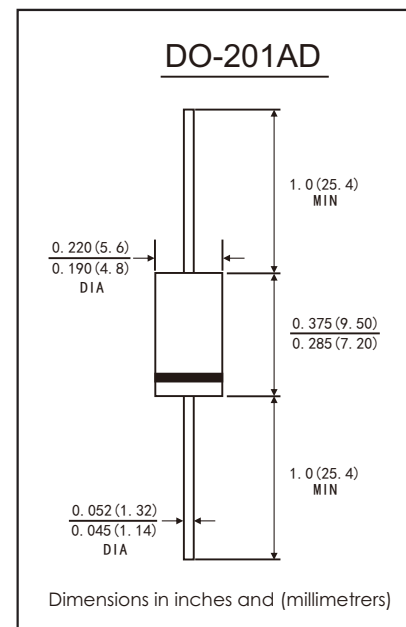

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%

		Symbols	SR 520	SR 530	SR 540	SR 560	SR 5100	SR 5150	SR 5200	Units
Maximum repetitive peak reverse voltage		VRRM	20	30	40	60	100	150	200	Volts
Maximum RMS voltage		VRMS	14	21	28	42	71	105	140	Volts
Maximum DC blocking voltage		VDC	20	30	40	60	100	150	200	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)		I(AV)	5.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)		IFSM	150.0							Amps
Maximum instantaneous forward voltage at 5.0 A(Note 1)		VF	0.55			0.70	0.85	0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	TA=25°C	IR	100				20			μA
	TA=100°C		5				-			mA
	TA=125°C		-				3			
Typical junction capacitance(Note 3)		CJ	500				400			PF
Typical thermal resistance (Note 2)		RθJA RθJL	25.0 8.0							°C/W
Operating junction temperature range		TJ	-55 to+150							°C
Storage temperature range		TSTG	-55 to+150							°C

Notes: 1.Pulse test: 300μs pulse width,1% duty cycle

2.Thermal resistance from junction to lead vertical P.C.B. mounted , 0.375"(9.5mm)lead length

3.Measured at 1MHz and reverse voltage of 4.0 volts

SCHOTTKY BARRIER RECTIFIER

RATING AND CHARACTERISTIC CURVES SR520 - SR5200

FIG.1-FORWARD CURRENT DERATING CURVE

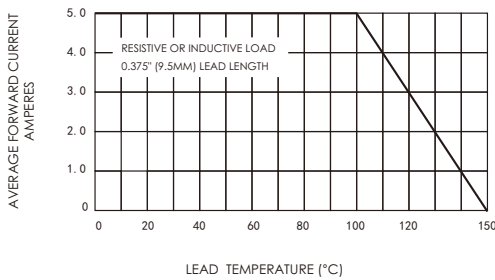


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

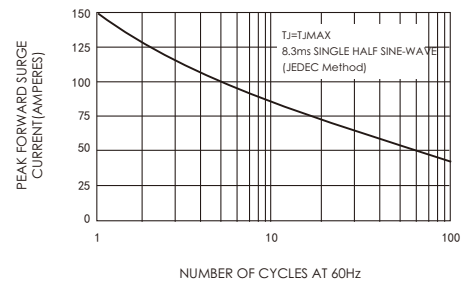


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

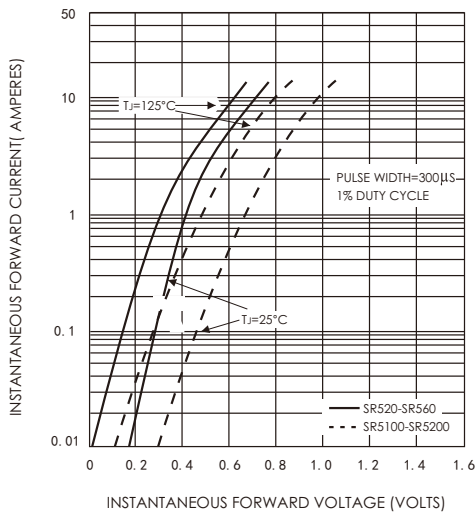


FIG.4-TYPICAL REVERSE CHARACTERISTICS


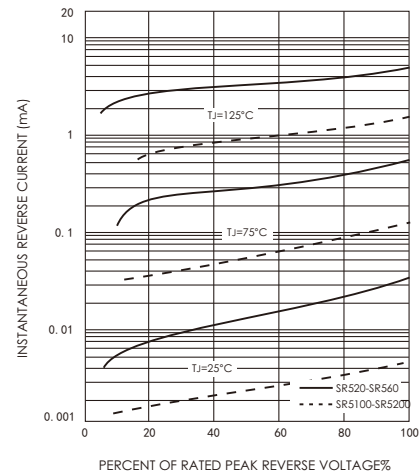


FIG.5-TYPICAL JUNCTION CAPACITANCE

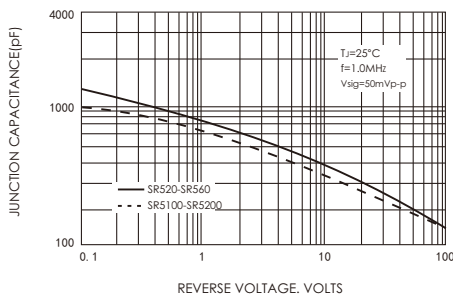

Disclaimer

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

This is a Property of Master Instrument Corporation.

Email: sales@micindia.com

Website: www.micindia.com