


Features

- 100A Contact Change-over Capacity
- With Opening and Dust-proof Type

Power Relay

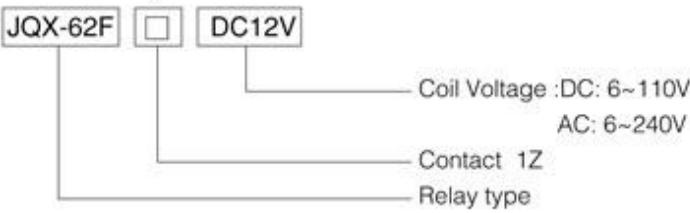

Contact Ratings

Contact Ratings	1Z, 1H, 1D
Contact Resistance	100mΩ(1A 6VDC)
Contact Material	AgCdO
Contact capacity	100A 120A 250VAC

Specification

Insulation Resistance	1000MΩ.500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V 1 min
Operate Time	25ms/25ms
Terminal Type	Terminal mounting


Coil Ratings

Nominal Coil Power	DC2.0W AC2.5VA
--------------------	----------------

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ±10%
6	4.80	0.60	18	6	4.80	1.80	9
12	9.60	1.20	70	12	9.60	3.60	36
24	19.2	2.40	290	24	19.20	7.20	144
48	38.4	4.80	1152	48	38.40	14.4	576
60	48.0	6.00	2800	110	88.00	36.0	3500
110	88.0	11.0	9650	220/240	176.00	72.0	12000/14400

Dimension.Bottom View

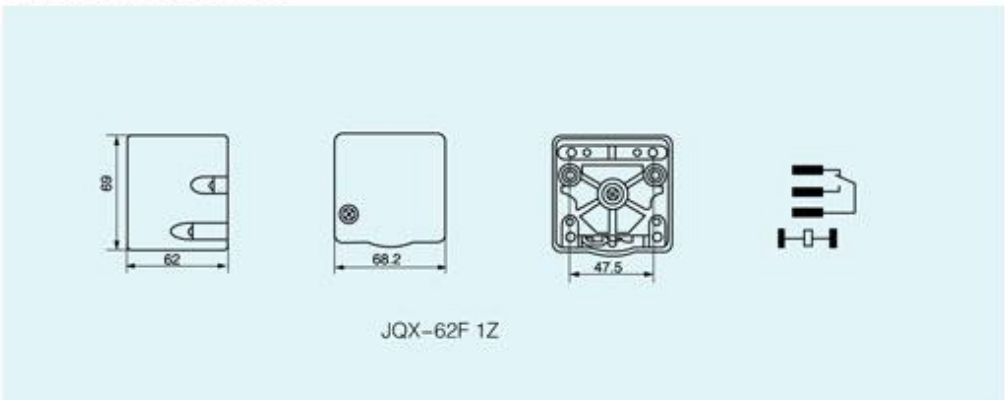

Reference Data

